

型号说明

示例: IX - 05N - P10 - 300 - 1K - C - J - P01B - Z

系列 Series

IX	内嵌式电动滑台 Electric actuator-Slider type
IXA	内嵌式电动推缸 Electric actuator-Rod Type
IX2	内嵌式智能电缸 Intelligent electric cylinder

本体宽幅 Width

04N	44mm
05N	54mm
07N	73mm
08N	82mm
10N	102mm
12N	120mm

导程Lead

P03	3mm
P05	5mm
P10	10mm
P20	20mm
P32	32mm

(各系列适用导程参见详细页面)

马达方位 Motor Position

1K	马达直连外露 Motor exposed
2R	马达右侧安装 Motor right side
2L	马达左侧安装 Motor left side
3	马达底侧安装 Motor bottom side

行程 Stroke

50	50mm
1250	1250mm

(每50mm一个间隔)  
50mm increments

精度等级 Precision

C	普通级Common
P	精密级Precision

感应开关 Sensor

J	3组,外挂左侧 3 sets,outside left
K	3组,外挂右侧 3 sets,outside right
N	无感应开关 None

特殊选项

型式 Code	说明 Name	参照页 Ref. Page
RH	原点变更到远离马达侧 Home sensor on the opposite side	028
PN	光电传感器采用PNP型 PNP type sensor	028
ST	行走平行度高精度定制 High straightness	028
BK	外观采用黑色光泽 Black extenor	028
FB	特殊滑块长度 Special slide length	028
Q	安装孔变更 Change of mounting holes	028
Z	马达客户自配 Motor provided by customers	028


马达规格

伺服马达 Servo Motor	P	标配:松下 ※Panasonic		B	带制动器
		5A	50W		with brake
M	三菱 Mitsubishi	01	100W	无记号	不带制动器 without brake
Y	安川 Yaskawa	02	200W		
D	台达 Delta	04	400W		
S	三协 Sankyo	08	750W		
A	禾川 HCFA				
C	西门子 Siemens				
H	汇川 Inovance				
X	其他品牌 others				


注:使用非上述品牌电机时,请加注具体型号。  
Note:Motor model is needed when using other brands not mentioned above.  
※Default motor brand

感应器接线图

(以欧姆龙为例)

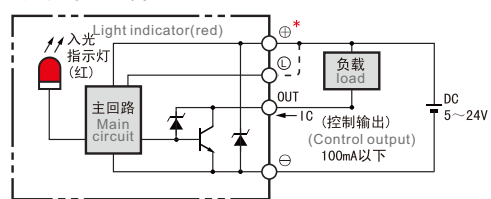

\* 端子配置因型号而异,请通过外形尺寸图进行确认。  
The terminal configuration is different from the model, please confirm by the outline size chart.

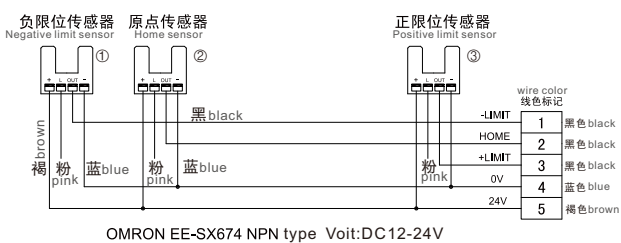

注3: 感应器电源不可与马达驱动器、感性负载(如线圈、电磁阀等)共用电源,感应器正负极反接或电源过压将会导致感应器损坏。

Note 3: The sensors power can not be shared with motor drivers, inductive loads(such as coils, solenoid valves. Please make sure that the positive and negative poles can not be reversed, otherwise the sensor will be damaged.